

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 10 TOWNSHIP 15 RANGE 5

DATE: 8-03-03

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: _____ Harrison



METHOD OF ESTABLISHMENT: _____ County: 9-1-98

IN. S.P.C. E ZONE NAD '83

NAME: 15051004

N: 501210.3300(m)

E: 73912.8680(m)

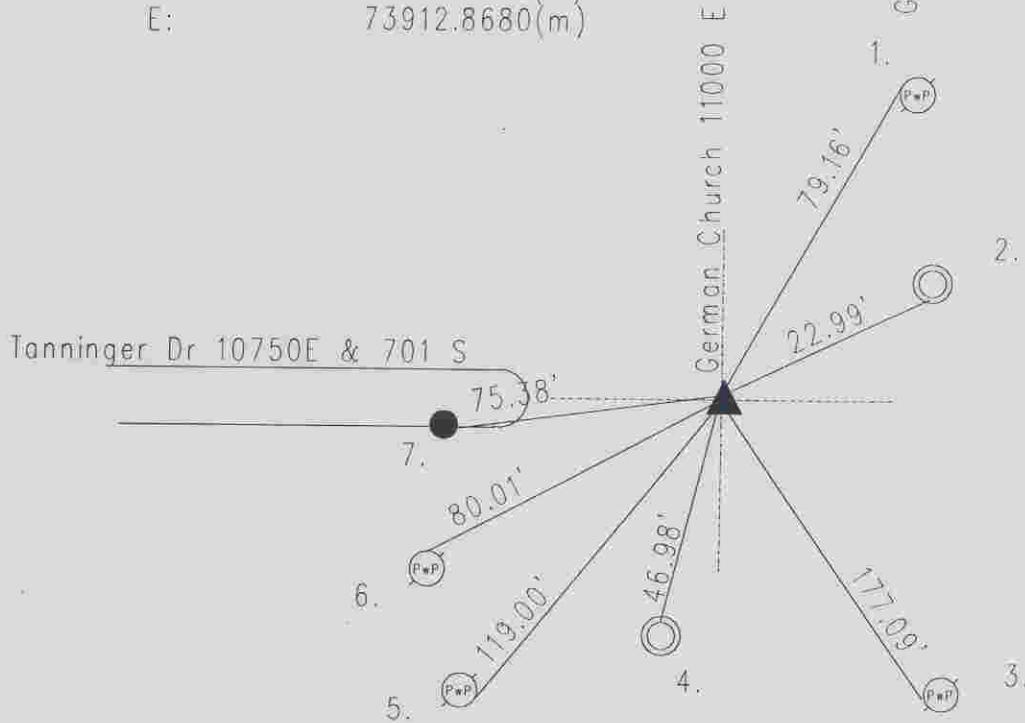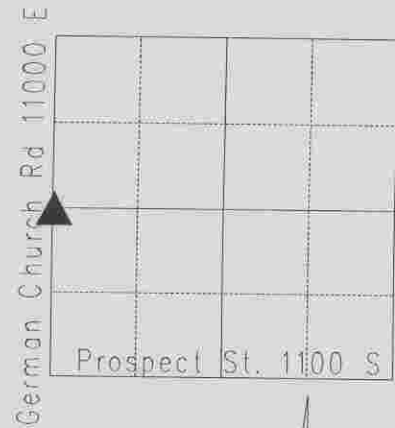

Original post set 1820 by Hendricks with witness: 6" beech N 89 W 6 links; 24" beech S 32 E 29 links per Marion County Atlas. Legal survey 5-19-1885 by hosbrook found per Warren Township Legal Survey Book pg. 28. called corner "C" gives reference to a 16" gum S 43 1/2 W 60 links and 5" ash S 57 W 34 links. Distances are given to corners W and S. Legal survey 11-15-1895 per Warren Township Legal Survey Book pg. 60. by Coyner showed symbol of stone. Excavated 9-21-1983 three stones found stacked vertically with wooden stake below them. Harrison set. Re-tied 9-1-98. Re-tied 8-03-03 by Wilcoxon.
15051004

REF.	DISTANCE	DESCRIPTION
1.	79.16'	PK nail w/brass washer NW PwP#105-551 EB 10"up
2.	22.99'	Cut 'x' S-end of manhole rim
3.	177.09'	PK nail w/brass washer W PwP#28-581 E 10"up
4.	46.98'	Cut 'x' N-rim of sewer manhole
5.	119.00'	PK nail SE PwP#251-581 D 4"up
6.	80.01'	PK nail N PwP#260-581 D 4"up
7.	75.38'	PK nail w/brass washer in curb joint S-edge:Flowers & Scrubs